

High-quality product  
Temperature uniformity  
Ensuring safety of storage



Temp. Uniformity



Pulling down to 5°C



Temp. recovery after door opened for 1 min

\*Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 25°C.

**YC-1505L**

**Features**



**Temperature control system**  
Display temp. in 0.1°C increments



**Double-pane glass door**  
Automatic electric heating function



**Hydrocarbon refrigerant**  
Environment-friendly natural gas



CE certificate




**Built-in data logger**  
Export up to 12 months of temperature data





**Alarms system**  
Multiple alarm functions

**Structure**

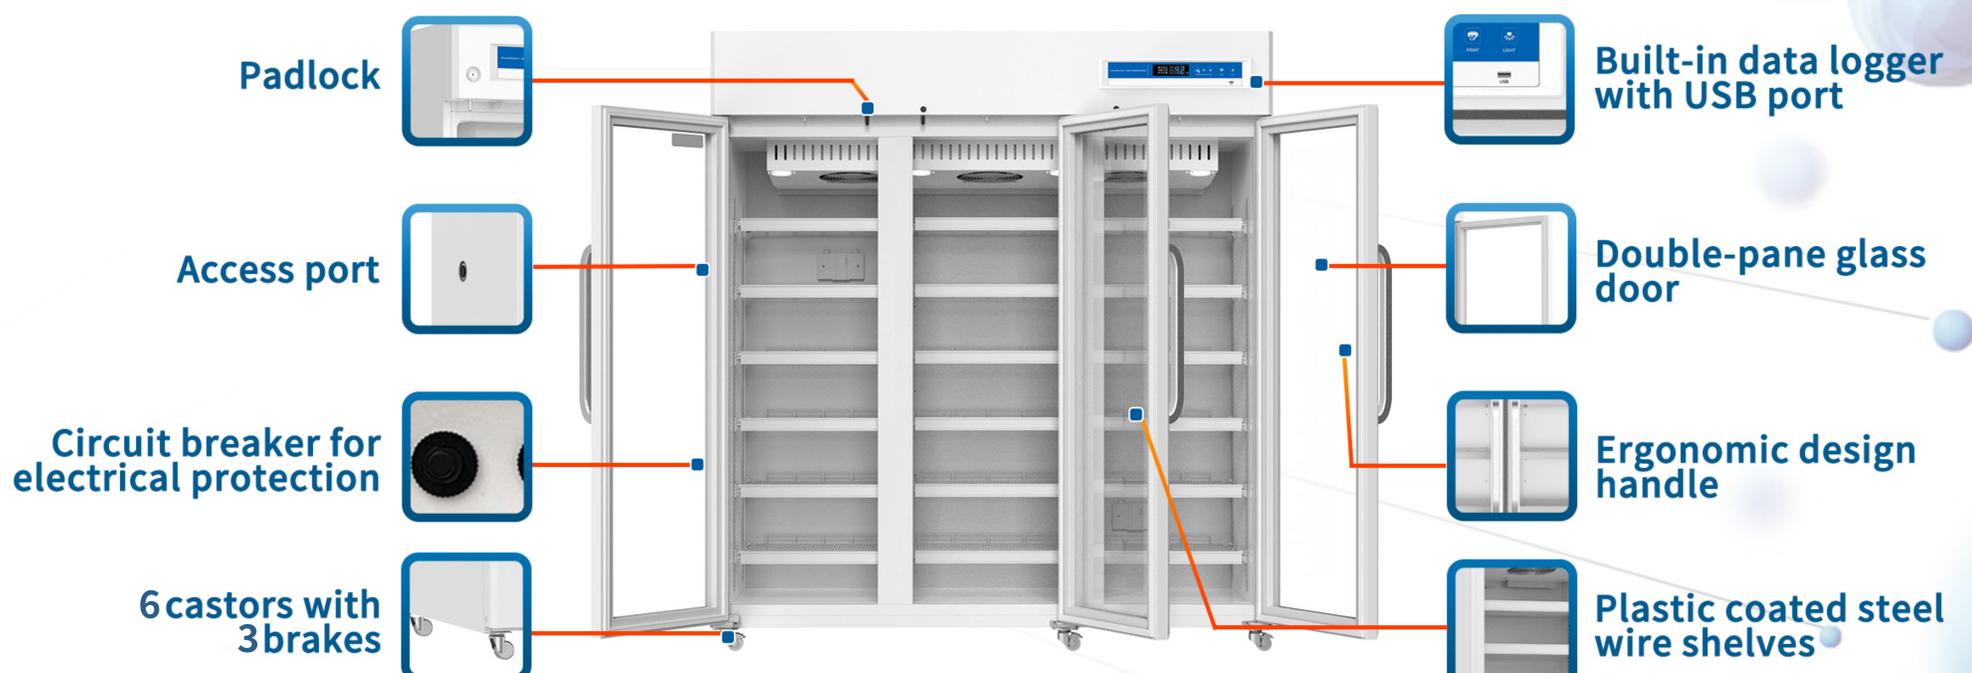

## Dimensions

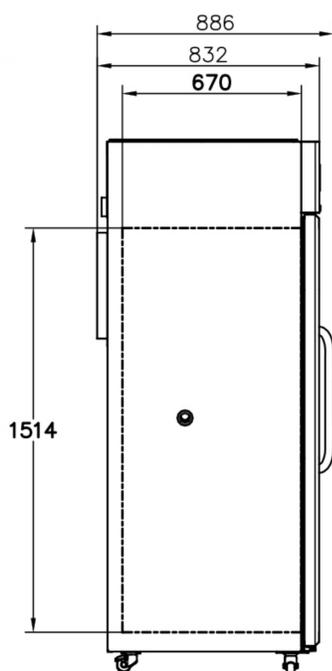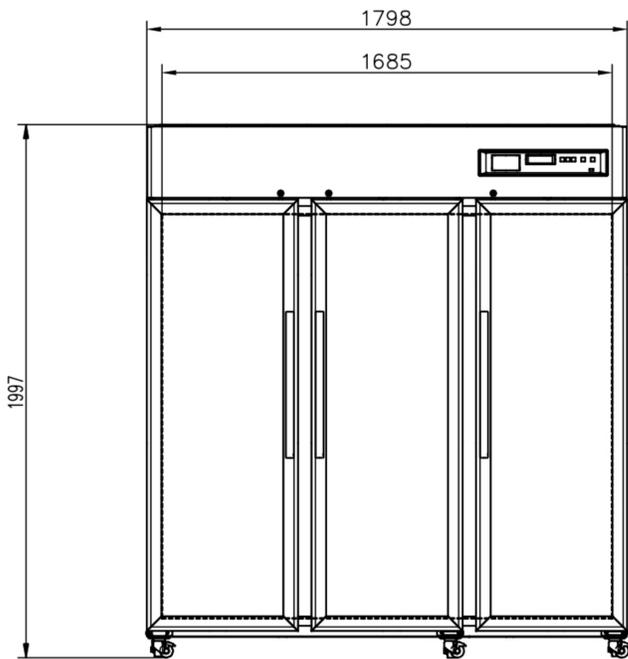

## Specification

2~8°C Pharmacy Refrigerator	
Model	YC-1505L
Capacity	1505L
Internal Size (W*D*H) mm	1685×670×1514
External Size (W*D*H) mm	1798*832*1997
Package Size (W*D*H) mm	1928*988*2165
NW/GW (kgs)	322/414
Performance	
Temperature Range	2~8°C
Ambient Temperature	16~32°C
Cooling Performance	5°C
Climate Class	N
Controller	Microprocessor
Display	Digital Display
Refrigeration	
Compressor	1pc
Cooling Method	Air Cooling
Defrost Mode	Automatical
Refrigerant	R290
Insulation Thickness(mm)	D:55, L/R:55, B:55, U/D:65/62
Construction	
External Material	PCM
Inner Material	Stainless Steel
Shelves	18
Access Test Port	1pc. Ø 25 mm
Casters	6+3
Data Logging/ Interval /Recording Time	USB/Record every 5 minutes/100,000 data
Interface	Remote Alarm Contact, RS485
Backup Battery	Yes
Alarms	
Temperature	High/Low Temperature, High Ambient Temperature, Condenser High Temperature Alarm
Electrical	Power Failure, Low Battery, Battery Power Detection
System	Data Communication Failure, Door Ajar, Data Logger Failure
Electrical	
Power Supply(V/Hz)	220-240V;50/60Hz
Rated Current(A)	5.2A