


Intelligent Control & Constant Temperature
Multiple Alarms Bring More Security



Temp. uniformity

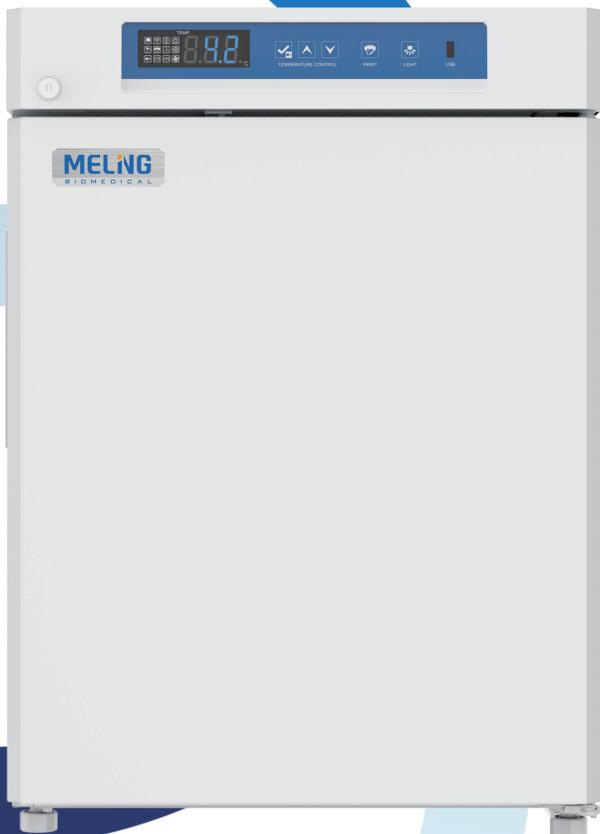

Pulling down to 5°C



Temp. recovery after door opened for 1 min

*Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 22°C.

YC-75EL

Features



Temperature control system
Display temp. in 0.1°C increments



Hidden handle



Hydrocarbon refrigerant
Environment-friendly natural gas



CE certificate



Foaming Door





Alarms system

Structure



● Dimensions

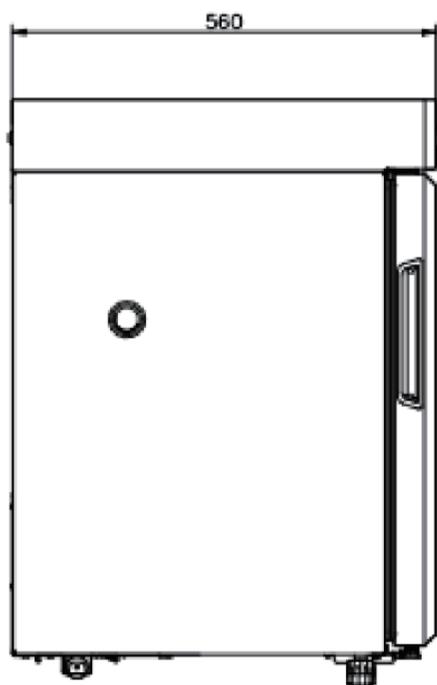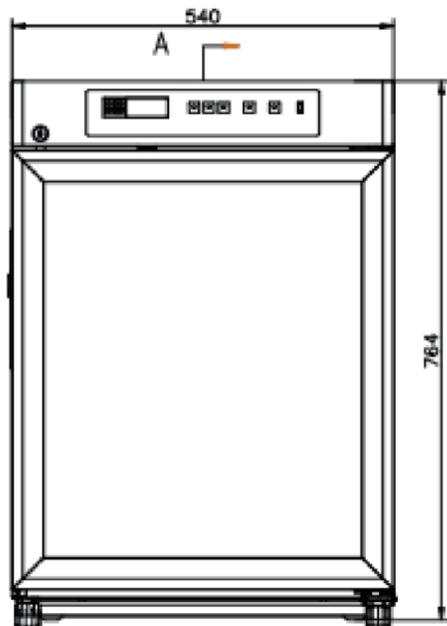

● Specification

2~8°C Pharmacy Refrigerator	
Model	75EL
Capacity	75
Internal Size (W*D*H) mm	444×440×536
External Size (W*D*H) mm	540×560×764
Package Size (W*D*H) mm	575×617×815
NW/GW (kgs)	41/45
Performance	
Temperature Range	2~8°C
Ambient Temperature	16~32°C
Cooling Performance	5°C
Climate Class	N
Controller	Microprocessor
Display	Digital Display
Refrigeration	
Compressor	1pc
Cooling Method	Forced Air Cooling
Defrost Mode	Automatical
Refrigerant	R600a
Insulation Thickness(mm)	D:58, L/R:48, B:50
Construction	
External Material	PCM
Inner Material	Sprayed Aluminum Plate
Shelves	3(coated steel wired shelf)
Access Test Port	1pc. Ø 25 mm
Casters	2+(2 leveling feet)
Data Logging/ Interval /Recording Time	USB/Record every 10 minutes/100.000 data
Interface	Remote Alarm Contact, RS485
Backup Battery	Yes
Alarms	
Temperature	High/Low Temperature, High Ambient Temperature
Electrical	Power Failure, Low Battery, Sensor Error
System	Data Communication Failure, Door Ajar,Data Logger Failure
Electrical	
Power Supply(V/Hz)	220-240V/50Hz
Rated Current(A) Data	0.92A