


Intelligent Control & Constant Temperature
Multiple Alarms Bring More Security



YC-75L

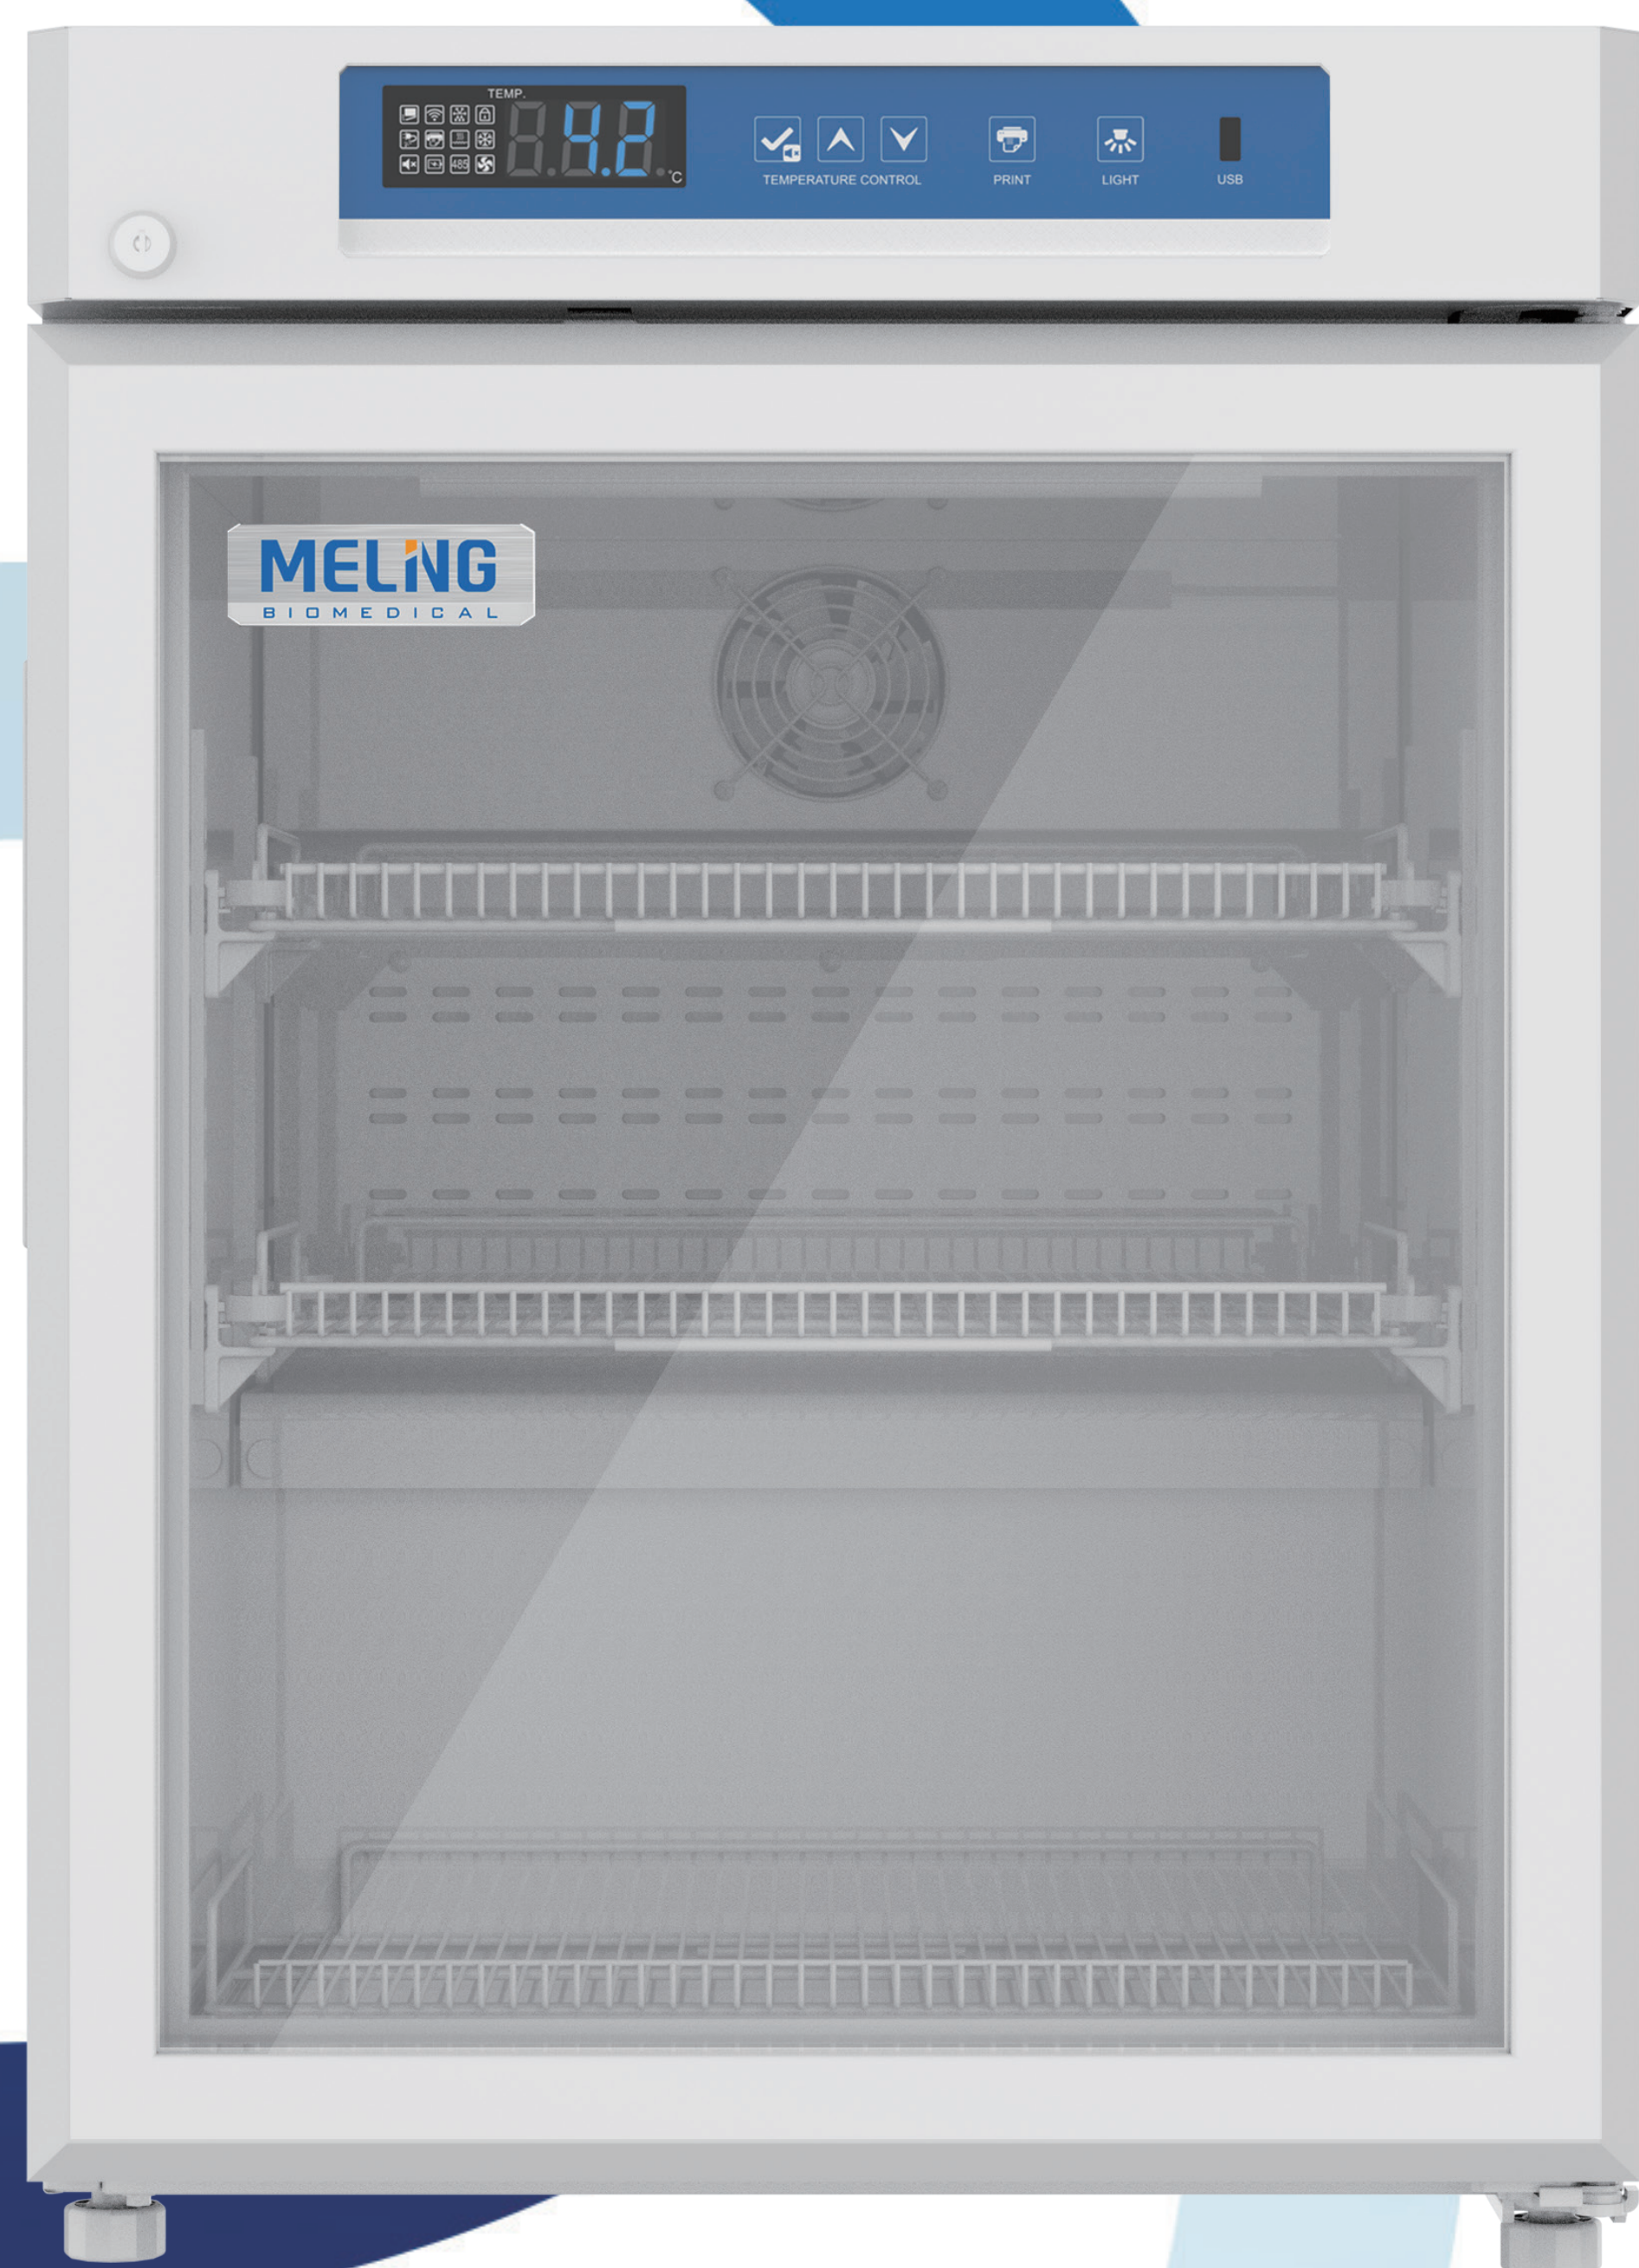

Temp. uniformity



Pulling down to 5°C



Temp. recovery after door opened for 1 min

**Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 22°C.*

Features



Temperature control system
Display temp. in 0.1°C increments



Hidden handle



Hydrocarbon refrigerant
Environment-friendly natural gas



CE certificate




Double-pane glass door
Automatic electric heating function





Alarms system

Structure

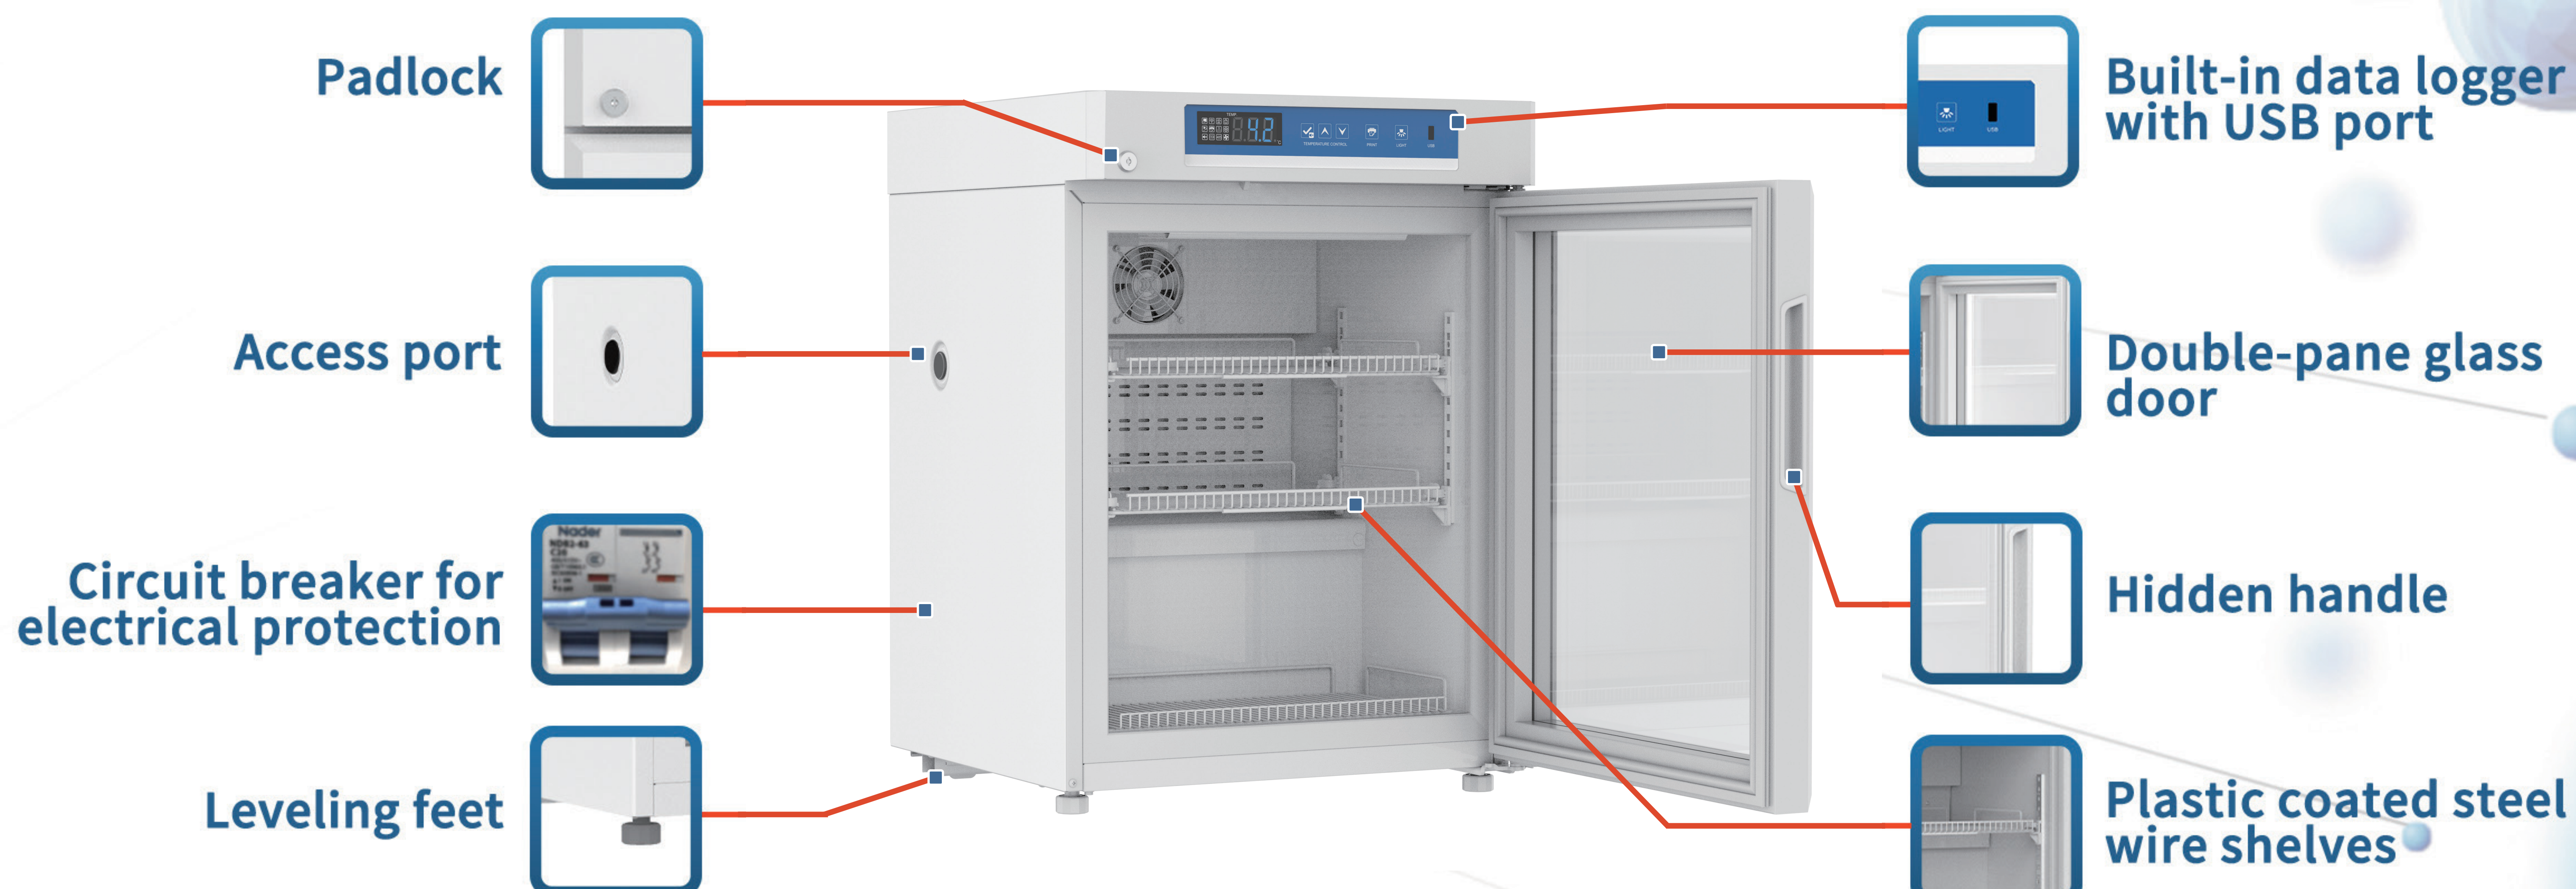

Dimensions

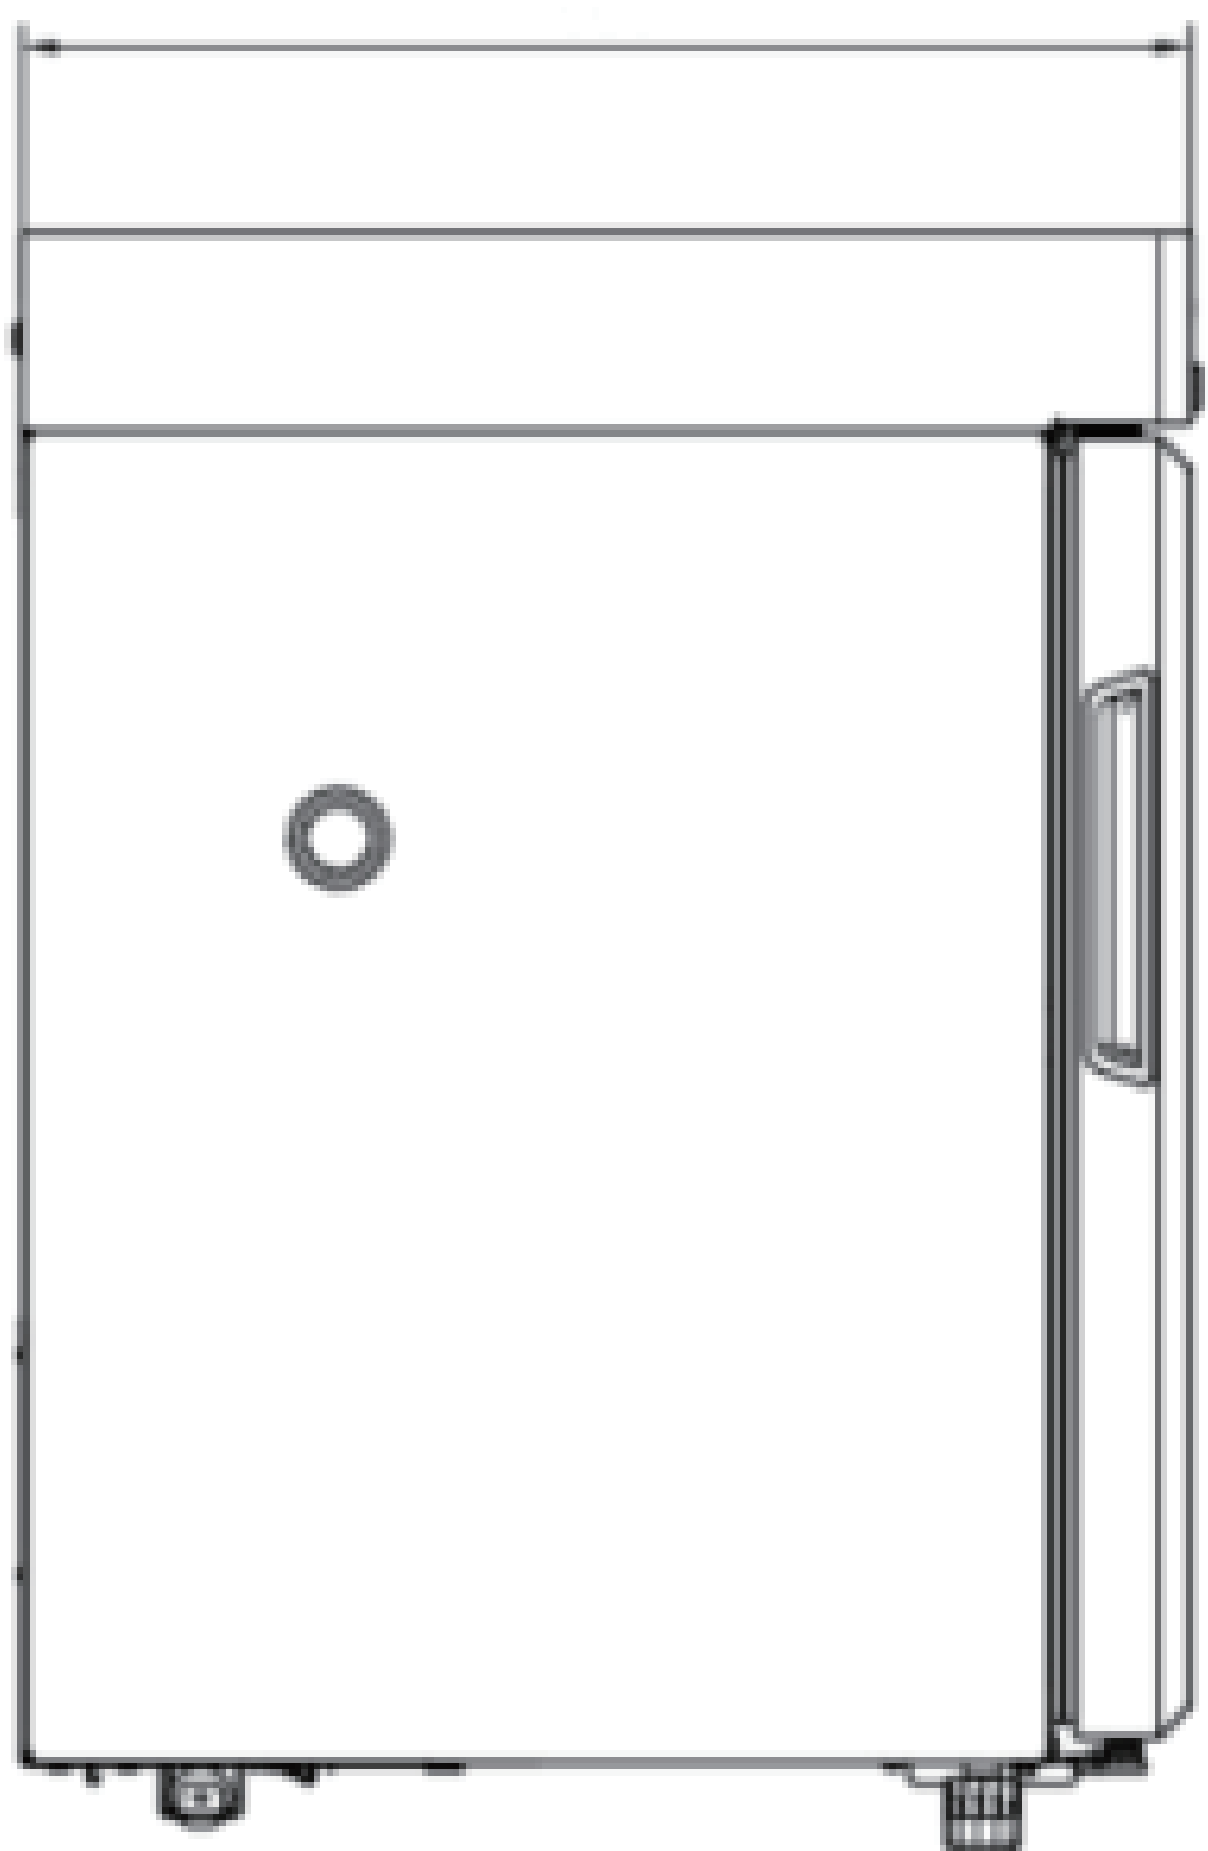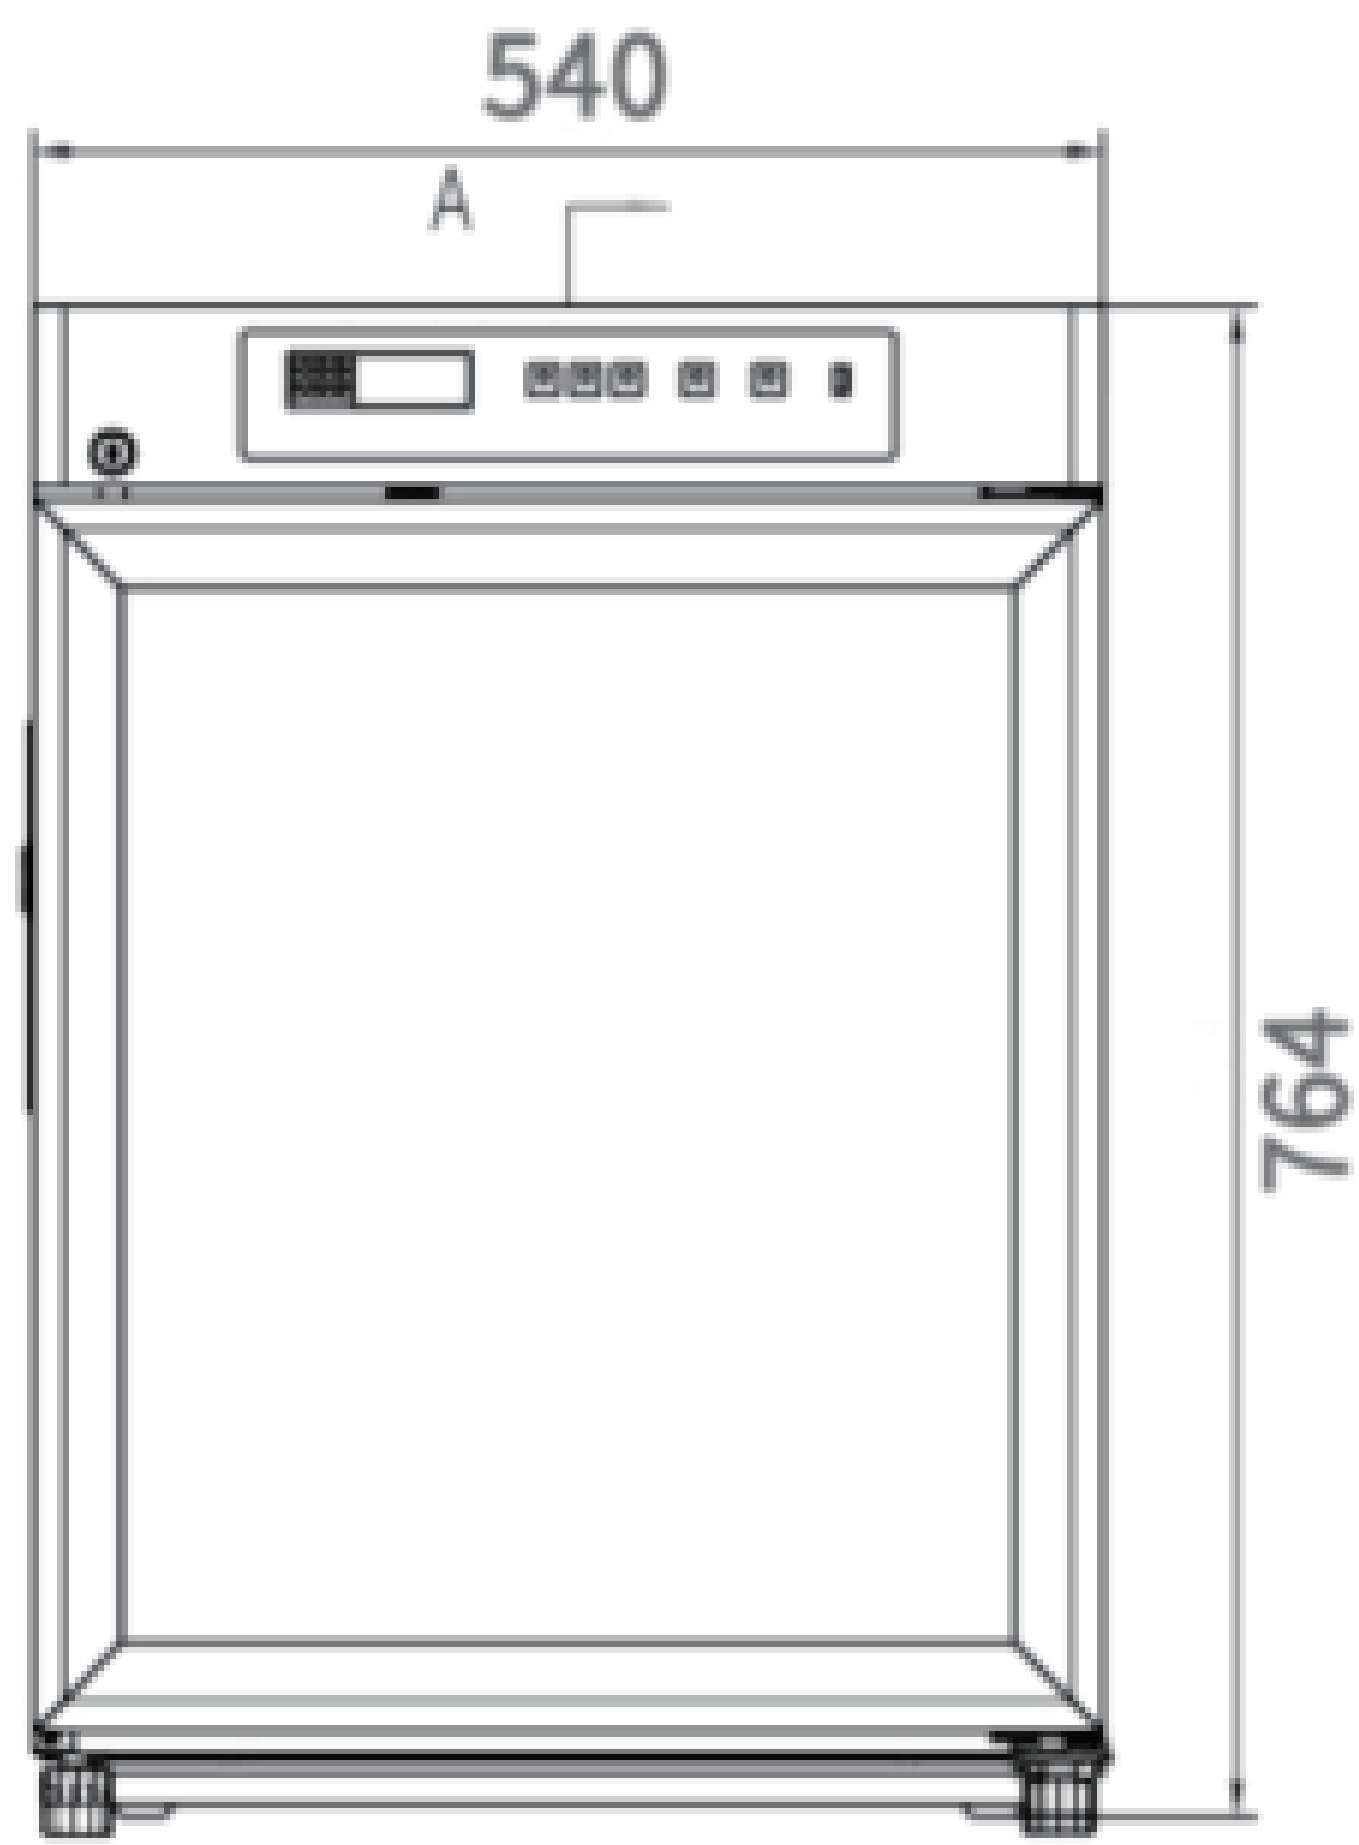

Specification

2~8°C Pharmacy Refrigerator	
Model	75L
Capacity	75
Internal size (W*D*H) mm	444×440×536
External size (W*D*H) mm	540×560×764
Package size (W*D*H) mm	575×617×815
NW/GW (kgs)	41/45
Performance	
Temperature range	2~8°C
Ambient temperature	16~32°C
Cooling performance	5°C
Climate class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	1pc
Cooling method	Forced air cooling
Defrost mode	Automatical
Refrigerant	R600a
Insulation thickness(mm)	D:55, L/R:48, B:50
Construction	
External material	PCM
Inner material	Sprayed aluminum plate
Shelves	3(Coated steel wired shelf)
Access test port	1pc. Ø 25 mm
Casters	2+(2 Leveling feet)
Data logging/ Interval /Recording Time	USB/Record every 10 minutes/100.000 data
Interface	Remote alarm contact, RS485
Backup battery	Yes
Alarms	
Temperature	High/Low temperature, High ambient temperature
Electrical	Power Failure, Low Battery, Sensor Error
System	Data Communication Failure, Door Ajar, Data logger failure
Electrical	
Power supply(V/Hz)	110V/60Hz 220-240V; 50/60Hz
Rated current(A)	1.24A 0.92A/0.56A