

High-quality product
Temperature uniformity
Ensuring safety of storage



YC-725L



Temp. Uniformity



Pulling down to 5°C



Temp. recovery after door opened for 1 min

*Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 25°C.

Features



Temperature control system
Display temp. in 0.1°C increments



Double-pane glass door
Automatic electric heating function



Hydrocarbon refrigerant
Environment-friendly natural gas



CE certificate



Built-in data logger
Export up to 12 months of temperature data





Alarms system
Multiple alarm functions

Structure



Dimensions

Specification

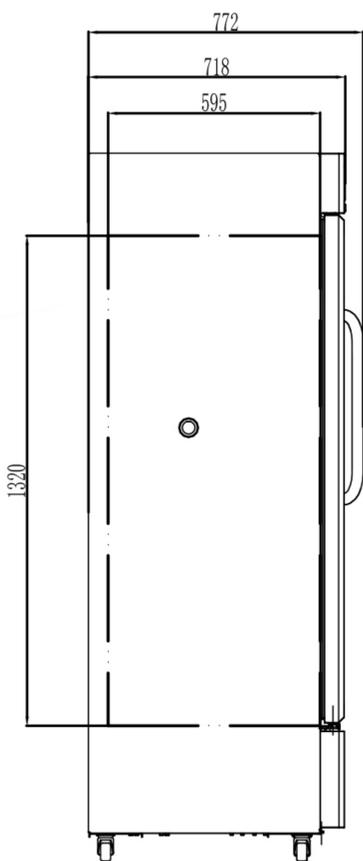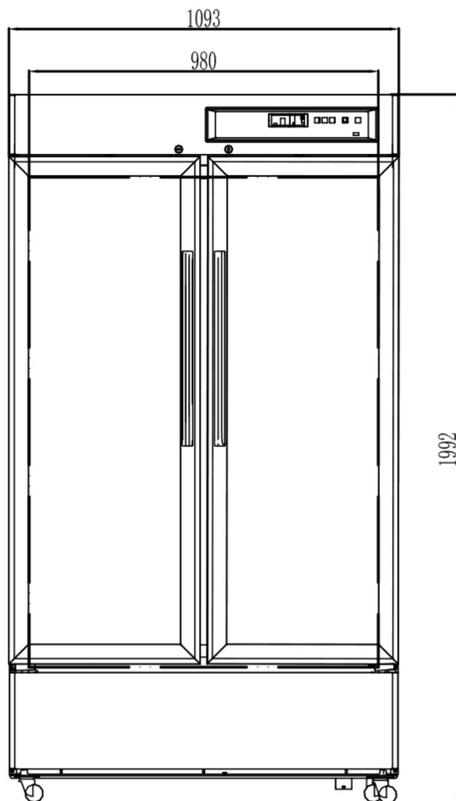

2~8°C Pharmacy Refrigerator

Model	YC-725L
Capacity	725L
Internal Size (W*D*H) mm	980×595×1260
External Size (W*D*H) mm	1093*718*1992
Package Size (W*D*H) mm	1187*795*2136
NW/GW (kgs)	171/208

Performance	
Temperature Range	2~8°C
Ambient Temperature	16~32°C
Cooling Performance	5°C
Climate Class	N
Controller	Microprocessor
Display	Digital Display

Refrigeration	
Compressor	1pc
Cooling Method	Air Cooling
Defrost Mode	Automatical
Refrigerant	R290
Insulation Thickness(mm)	D:55, L/R:55, B:55, U/D:65/80

Construction	
External Material	PCM
Inner Material	Sprayed Aluminum Plate
Shelves	12
Access Test Port	1pc. Ø 25 mm
Casters	4+2
Data Logging/ Interval /Recording Time	USB/Record every 5 minutes/100,000 data
Interface	Remote Alarm Contact, RS485
Backup Battery	Yes

Alarms	
Temperature	High/Low Temperature, High Ambient Temperature, Condenser High Temperature Alarm
Electrical	Power Failure, Low Battery, Sensor Error
System	Data Communication Failure, Door Ajar, Data Logger Failure

Electrical	
Power Supply(V/Hz)	220-240V;50/60Hz
Rated Current(A)	3.90A